



10" Wide



7" Wide


### Expand your business

All the hardware is compatible with GP-ProEX. With GP-ProEX available, screens can be created on all the equipment. One platform for all the equipment helps develop a new business.



### Easy Connection

GP4000E Series support connection with a wide range of industrial controllers including PLCs, motion controllers, robot, vision sensor and other devices.



97 drivers

## Easy Create Screen


### Easy Screen Creation

GP-Pro EX has an extensive variety of functions for designing beautiful, realistic screens.




### Reduces setup time

Transferring a screen to multiple units takes much more time than expected. GP4000E series allows you to transfer the screen to them in block via Ethernet.

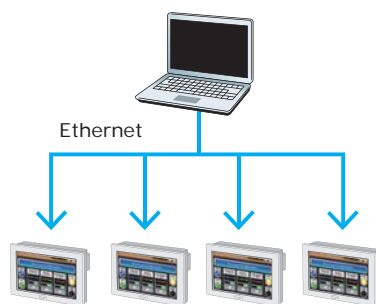


### Reduce PLC's CPU load

GP4000E series can be connected directly to a range of devices. Also, using internal logic can reduce PLC's CPU load.

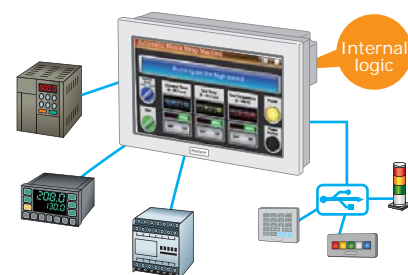

## Specifications

		PFXGP4502WADW	PFXGP4402WADW
			
Display Size		10"	7"
Display Type		TFT Color LCD	
Resolution		800 x 480 pixels (WVGA)	
Display Colors		65,536 Colors	
Backlight		LED	
Application Memory		FLASH EPROM 32 MB *1	
Data Backup		FLASH EPROM 128 KB	
Interface	Serial (COM1)	RS-232C (D-Sub 9-pin, plug)	
	Serial (COM2)	RS-422/485 (D-Sub 9-pin, plug)	
	Ethernet (LAN)	10/100/1,000 Mbps (RJ-45 Modular jack)	
	USB (TYPE-A)	USB 2.0 x 1 (Type A)	
	USB (mini-B)	USB 2.0 x 1 (mini-B)	
International Safety Standards		CE	
Rated Input Voltage		24 Vdc	
Power Consumption		10 W	9.2 W
Ambient Operating Temperature		0 to 50 °C [32 to 122 °F]	
Electrostatic Discharge Immunity		EN/IEC 61131-2 4 kV contact, 8 kV air	
Structure		Front Panel: IP 65 (IEC60529), Enclosure type 4 indoor use only (UL 50) with screw installation fasteners, Rear Panel: IP 20 (IEC 60529)	
Coating		The PCBA is coated against dust and humidity.	
Weight Approx.		1.075 kg [2.370 lb]	0.56 kg [1.235 lb]
External Dimensions		W275 x H206 x D38.2 mm [W10.85 x H8.11 x D1.50 in.]	W207 x H152.4 x D38.2 mm [W8.15 x H6.00 x D1.50 in.]

\*1 Capacity available for user application. The capacity depends on how many fonts you load from the Editor software.

Cutting

255 x 185  
+1mm

190 x 135  
+1mm

## ⚠ WARNING

### HAZARD OF OPERATOR INJURY, OR UNINTENDED EQUIPMENT DAMAGE

Before operating any of these products, be sure to read all related manuals thoroughly.

Failure to follow these instructions can result in death, serious injury or equipment damage.

- For printing purposes, the colors in this catalog may differ from those of the actual unit.
- Actual user screens may differ from the screens shown here.
- Electric equipment should be installed, operated, serviced, and maintained only by qualified personnel.
- All product names used in this catalog are the registered trademarks or trademarks of their respective companies.
- All information contained in this catalog is subject to change without notice.
- No responsibility is assumed by Digital for any consequences arising out of the use of this material.

**Pro-face**  
for the best interface

Visit our website for more information.  
<http://www.proface.com>

Global Headquarters  
Digital Electronics Corporation  
[JAPAN] Tel: +81-(0)6-6208-3133

North/South American Headquarters  
Pro-face America, Inc.  
[U.S.A.] Tel: +1-734-477-0600

European Headquarters  
Pro-face Europe B.V.  
[THE NETHERLANDS] Tel: +31 (0)23 55 44 099

[AUSTRALIA] Tel: +61 (0)3 9550 7396  
[DENMARK] Tel: +45 70 22 01 22  
[GERMANY] Tel: +49 (0)212 258 260  
[ITALY] Tel: +39 0362 59 96 1  
[SOUTH KOREA] Tel: +82-(0)2-2630-9850  
[SWITZERLAND] Tel: +41 (0)43 343 7272  
[SINGAPORE] Tel: +65-6832-5533

[AUSTRIA] Tel: +43 7236 3343 620  
[ENGLAND] Tel: +44 (0)2476 511288  
[INDIA] Tel: +91 80 4333 3540  
[POLAND] Tel: +48 22 465 66 62  
[SPAIN] Tel: +34 (0)93 846 07 45  
[TAIWAN] Tel: +886-(0)2-2657-1121

[CHINA] Tel: +86-(0)21-6361-5175  
[FRANCE] Tel: +33 (0)1 60 21 22 91  
[INDONESIA] Tel: +62 21 750 4496  
[RUSSIA] Tel: +7 (812)336 47 06  
[SWEDEN] Tel: +46 46 540 90 70  
[THAILAND] Tel: +66-(0)2-617-5678